
TECHNICAL DATA SHEET



Range: Washbasin single self-closing tap

Ref: 64705 - PRESTO NEO DUO deck-mounted tap - Single timed-flow - 7 sec. (PRESTOGREEN)



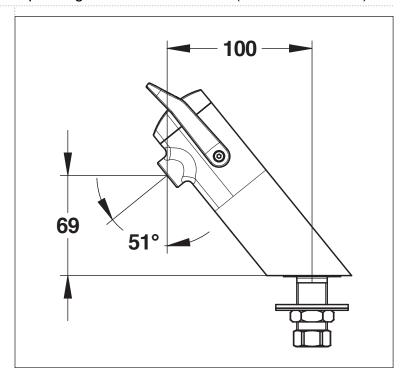

> Working pressure:

• 1 to 5 bar

> Flow:

- 3 l/min at 3 bars 4-position setting
- Anti water-hammer system

> Flow time:

• 7 seconds - lever upwards or downwards

> Hydraulic supply:

• G 1/2" x 40

> Thermal resistance:

• This tap can withstand a thermal shock of 75°C for 30 minutes as part of a thermal shock programme

> Convenience:

- Soft-touch
- · Two-coloured ergonomic lever, in glass fiber reinforced polymer

> Delivered with:

- 1 Filter gasket
- 1 base gasket
- 1 fixture nut + 1 stainless steel washer
 1 rubber flat gasket
 1 coloured sticker

> Standards / Approvals:

- Chrome-plated brass body compliant with standards NF EN1982 / NF EN12164 / NF EN12165
 Nickel-Chrome surface treatment compliant with NF EN12540
 Neutral Salt Spray (NSS) resistant: 200 h according to NF ISO 9227
 NF compliant (in progress)















